

TYPICAL FREQUENCY RESPONSE  
**FIGURE 1**

### GENERAL

The Shure Model SM11 is a miniature dynamic lavalier microphone designed for use in television broadcasting (on camera), for sound reinforcement, in certain radio and motion picture applications, and similar uses where a small, professional-quality, microphone is required. The SM11 has an omnidirectional pickup pattern, and its frequency response is optimized for lavalier use. The microphone is supplied with a tie clasp assembly, tie tack assembly, connector belt clip, and zippered carrying/storage bag. An optional kit for mounting the SM11 on various musical instruments is available as Shure Model RK279.

### Features

- Frequency response optimized for lavalier use. Acoustically matches most stand- or desk-mounted microphones
- Small and lightweight for unobtrusive, virtually unseen operation
- Smooth exterior and recessed grille screen minimize clothing noise
- Rugged aluminum case construction
- Extremely flexible long-life cable
- Two mounting options—tie clasp or tie tack
- Convenient, secure belt clip attaches connector to belt or clothing

### SPECIFICATIONS

#### Type

Dynamic

#### Frequency Response

50 to 15,000 Hz (see Figure 1)

### Polar Pattern

Omnidirectional

### Impedance

Microphone rating impedance is 150 ohms (200 ohms actual) for connection to microphone inputs rated at 19 to 300 ohms

### Output Level (at 1,000 Hz)

Open Circuit Voltage ..... -64 dBV/Pa (0.60 mV)  
(1 Pa = 94 dB SPL)

### Polarity

Positive pressure on diaphragm produces positive voltage on pin 2 with respect to pin 3

### Hum Pickup

35 dB equivalent SPL in a 1 millioersted field

### Cable

Non-detachable, 1.2 m (48 in.), two-conductor, shielded, plastic-covered

### Connector


Professional three-pin audio (XLR).

### Case

Aluminum with gray enamel finish

### Dimensions

See Figure 2

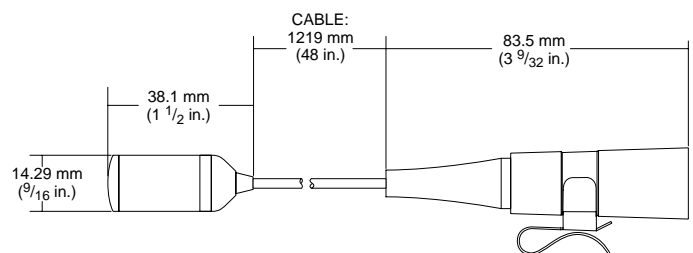


OVERALL DIMENSIONS  
**FIGURE 2**

## Net Weight

7.9 grams (0.28 oz), less cable and connector

## Certification

Eligible to bear CE Marking. Conforms to European EMC Directive 89/336/EEC. Meets applicable tests and performance criteria in European Standard EN55103 (1996) parts 1 and 2, for residential (E1) and light industrial (E2) environments.

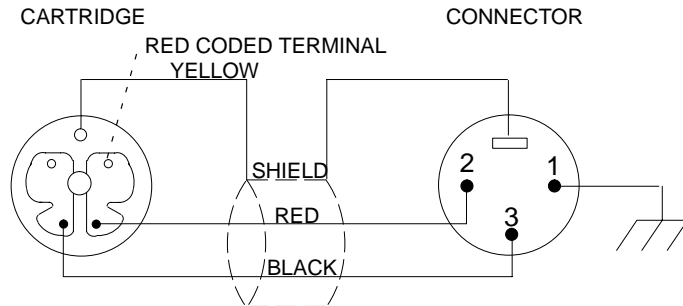

INTERNAL CONNECTIONS  
FIGURE 3

## INSTALLATION

### Tie Clasp Assembly

Insert the SM11 in the tie clasp and anchor the cable as shown in Figure 4. Affix the clasp to a tie, shirt, or blouse. Note that the microphone can be swiveled 360° in its holder for left, right, or vertical ("pen clip") use.



CABLE ANCHORING  
FIGURE 4

### Tie Tack Assembly

Remove the clutch from the tie tack assembly and insert the tie tack holder in the tie (or through the tie and shirt if desired). Affix the clutch to the pin of the tie tack holder. Insert the SM11 in the tie tack holder.

### Connector and Belt Clip

With the SM11 installed in one of the assemblies described above, insert the connector in the connector belt clip

and fasten the belt clip to the user's belt, waistband or other clothing. Excess microphone cable can be inserted in the user's pocket or tucked into the waistband.

## ARCHITECTS' SPECIFICATIONS

The microphone shall be a moving-coil (dynamic) type with a frequency response of 50 to 15,000 Hz. The microphone shall have an omnidirectional polar characteristic. The microphone shall be low impedance with a rated impedance of 150 ohms for connection to microphone inputs rated at 19 to 300 ohms. The microphone output shall be -64 dB where 0 dB = 1 milliwatt per 10 microbars.

The microphone shall be a lavalier type, and shall be provided with a 1.2m (48 in.) non-detachable, two-conductor, shielded cable with a professional, three-pin audio connector designed to mate with Cannon XL series, Switchcraft A3 (Q.G.) series or equivalent connectors. The microphone shall also be provided with a tie clasp assembly, tie tack assembly, connector belt clip, and carrying/storage bag.

The overall dimensions of the microphone shall be 33.5 mm (1 - 5/16 in.) in length and 14.7 mm (9/16 in.) in diameter.

The microphone shall be the Shure Model SM11 or equivalent.

## ACCESSORIES AND REPLACEMENT PARTS

The following furnished accessories and replacement parts can be ordered through your Authorized Shure Professional Products Dealer or from Shure Incorporated.

Tie Clasp Assembly .....	RK203TC
Tie Tack Assembly .....	90A2384
Connector Belt Clip .....	RK200BC
Carrying/Storage Bag .....	26A13
Cartridge .....	R99
Cable .....	C91
Instrument Mounting Kit .....	RK279

For additional service or parts information, please contact Shure's Service Department at 1-800-516-2525. Outside the United States, please contact your authorized Shure Service Center.

**SHURE**

SHURE Incorporated Web Address: <http://www.shure.com>  
5800 W. Touhy Avenue, Niles, IL 60714-4608, U.S.A.  
Phone: 800-257-4873 Fax: 847-866-2279  
In Europe, Phone: 49-7131-72140 Fax: 49-7131-721414  
In Asia, Phone: 852-2893-4290 Fax: 852-2893-4055  
Elsewhere, Phone: 847-866-2200 Fax: 847-866-2585

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>