



**1x8 Component
CAT-5 DA
USER MANUAL**

ASKING FOR ASSISTANCE

Technical Support:

Telephone (818) 884-6294
(800) 545-6900

Fax (818) 884-3108

Technical Support Hours:

9:00 AM to 5:00 PM Monday thru Friday.

Write To:

Gefen Inc.
C/O Customer Service
6265 Variel Ave.
Woodland Hills, CA 91367-9897

Notice

Gefen Inc. reserves the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.

1x8 Component CAT5 DA is a trademark of Gefen Inc.

© 2006 Gefen Inc., All Rights Reserved

TABLE OF CONTENTS

- 1** Operation Notes
- 2** Introduction
- 3** Features
- 4** Sender Panel Descriptions
- 5** Receiver Panel Descriptions
- 6** Connecting and Operating the 1x8 Component CAT5 DA
- 7** How to Adjust the Picture
- 8** CAT5 Wiring Diagram
- 9** Specifications
- 10** Warranty

OPERATION NOTES

READ THESE NOTES BEFORE INSTALLING OR OPERATING THE 1X8 COMPONENT CAT5 DA SYSTEM

- Use industry standard Category-5 (CAT-5) cable to operate the 1x8 Component CAT5 DA system. CAT-5e cable is preferred.
- Please connect all the cables between the computer and the 1x8 Component CAT5 DA system before powering up the 1x8 Component CAT5 DA Sender unit.
- The 1x8 Component CAT5 DA units are housed in a metal box for better RF shielding.

INTRODUCTION

Congratulations on your purchase of the ex•tend•it 1x8 Component CAT5 Distribution Amplifier. Your complete satisfaction is very important to us.

Gefen's line of Home Theater switchers, extenders, and Distribution Amplifiers are designed to make your A/V setup more comfortable, more productive and more affordable.

The 1x8 Component CAT5 DA allows one Component source to be distributed on up to eight displays. The 1x8 Component CAT5 DA also extends Component signals over 330 feet using industry standard Category 5 (CAT-5) Cable. All output displays will have mirrored images.

The ex•tend•it line offers solutions for home theater, A/V installation, data center, information distribution, conference room presentation, school and corporate training environments.

Our Commitment

Gefen will always offer the finest quality product at the best possible price. Included in that price is a lifetime support from a team of outstanding engineers.

How it Works

Simply connect your Component video source to the 1x8 Component CAT5 Distribution Amplifier's input using the supplied VGA to Component cable. Then connect up to eight Component displays to the Component CAT5 receivers over 330 feet using CAT-5 Cable. Then power the 1x8 Component CAT5 Distribution Amplifier and the receivers will get power from the CAT5. Note: Component output 1 is the primary connection and is used for the main display. Component output 2 through 8 follow the main display. The Component displays attached to the 1x8 Component CAT5 Distribution Amplifier **MUST** have the same native resolution in order to get a picture.

FEATURES

Features

- Distributes easily up to eight Component displays
- Extends each display up to 330 feet
- Maintains 480i, 480p, 720p, 720i, and 1080i, 1080p resolutions
- Distributes and extends Component or VGA video signals
- Installs in seconds

Includes:

The 1x8 Component CAT5 DA
One - 6' VGA to Component cable
5V6A DC Power Supply
Users Manual

SENDER PANEL DESCRIPTIONS



Power LED



Connects to
5VDC power
supply

Video CAT5
Out 1-4

VGA to Component
Cable Input

Video CAT5
Out 5-8

RECEIVER PANEL DESCRIPTIONS



EQ Knob Video CAT5 In Power LED



VGA to Component Cable Out

Connecting and Operating the 1x8 Component CAT5 DA

How to Connect the 1x8 Component CAT5 DA to your devices




- 1** Connect the supplied VGA to Component cable from the Component video source into the 1x8 Component CAT5 DA Sender "Comp In" port.
- 2** Connect a CAT-5e* cable from the "CAT5 Video Outs" on the 1x8 Component CAT5 DA Sender to the "CAT5 Inputs" on the Component CAT5 Distribution Receiver. (Repeat for each Receiver unit)
- 3** Connect the VGA to Component cable from the display to the "Comp Out" on the Component CAT5 Distribution Receiver. (Repeat for each Receiver unit)
- 4** Plug the 5VDC power supply into the 1x8 Component CAT5 DA Sender.

HOW TO ADJUST THE PICTURE



The first step in adjusting the video quality is to display text and a graphic on your monitor (i.e. desktop icons). Then set your computer to the resolution that you will be using most frequently. The dip switches are used to set the focus and sharpness of the picture to the best possible setting. Set the dip switches to the settings that are recommended for the different lengths of CAT5 cable (see chart below). Verify that the picture quality is to your satisfaction. If the recommended setting does not produce a great quality picture, try using a different dip switch setting. The trim pod next to the Component connector on the 1x8 Component CAT5 DA R allows brightness adjustments for video.

0-25 Feet	All dip switches OFF for all colors.
26-100 Feet	Set dip switch #1 ON all colors. 2,3,4 remain OFF.
101-200 Feet	Set dip switch #2 ON all colors. 1,3,4 remain OFF.
201-300 Feet	Set dip switch #3 ON all colors. 1,2,4 remain OFF.
301 Feet and Up	Set dip switch #4 ON all colors. 1,2,3 remain OFF.

NOTE: The dip switches are set to the OFF position when the switch is closest to the number or in the down position.



CAT5 WIRING DIAGRAM

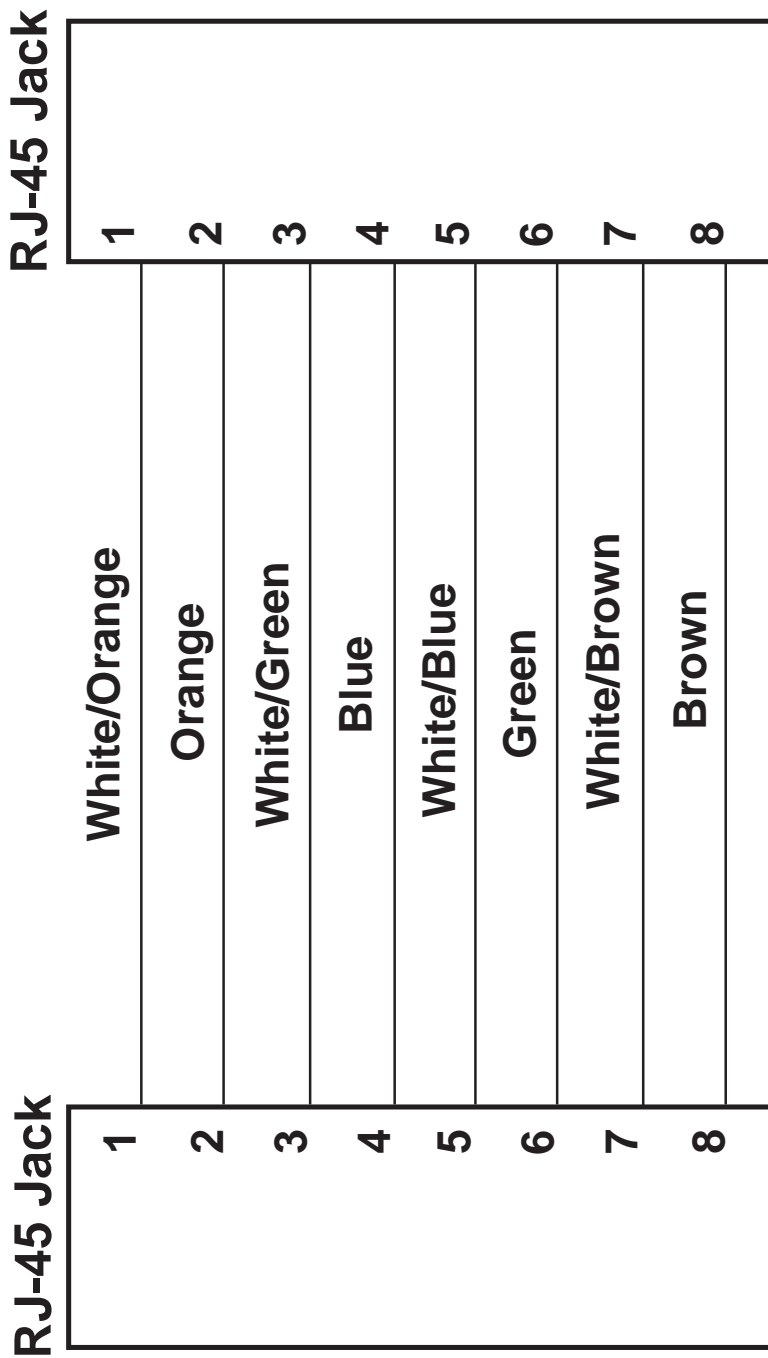

SPECIFICATIONS

Video Amplifier Bandwidth	350 MHz
Input Video Signal	1.2 volts p-p
Input DDC Signal	5 volts p-p (TTL)
Horizontal Frequency Range	15 - 70 KHz
Vertical Frequency Range	30 - 170 KHz
Single Link Range	1080p / 1920 x 1200
Input Connector Type	HD-15
Output Connector Type	HD-15
Link Connector Type	RJ-45
Power Consumption	30 Watts (max.)
Power Supply	5VDC
Dimensions	8.5"W x 1.75"H x 4.5"D
Shipping Weight	3 Lbs

WARRANTY

Gefen Inc. warrants the equipment it manufactures to be free from defects in material and workmanship.

If equipment fails because of such defects and Gefen Inc. is notified within one (1) year from the date of shipment, Gefen Inc. will, at its option, repair or replace the equipment, provided that the equipment has not been subjected to mechanical, electrical, or other abuse or modifications.

Equipment that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the of repair. Such repairs are warranted for ninety (90) days from the day of reshipment to the Buyer.

This warranty is in lieu of all other warranties expressed or implied, including without limitation, any implied warranty or merchantability or fitness for any particular purpose, all of which are expressly disclaimed.

The information in this manual has been carefully checked and is believed to be accurate. However, Gefen Inc. assumes no responsibility for any inaccuracies that may be contained in this manual. In no event will Gefen Inc., be liable for direct, indirect, special, incidental, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. The technical information contained herein regarding 1x8 Component CAT5 DA features and specifications is subject to change without notice.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>