

Product Specifications

KSM313 Dual-Voice Ribbon Microphone

Overview

The KSM313 is a premium bi-directional ribbon microphone for world-class audio and performance. The Dual-Voice design features discrete front-and-rear side sonic signatures for use with amplified instruments or in intimate vocal applications. Hand assembled in the USA with custom components and proprietary Roswellite™ technology for revolutionary ribbon resilience under extreme conditions.

Features

- Bi-directional polar pattern delivers premier audio with superior off-axis rejection
- True Dual-Voicing tuned specifically for user's choice of response - warm and full for amplifiers, or swivel for bright and flattering vocals
- Revolutionary Roswellite™ proprietary ribbon material replaces traditional foil ribbons with high tensile strength, toughness and shape memory that provides superior resilience at extreme SPLs
- Custom-sourced components for superior presence, minimized signal loss and maximized output
- 146dB SPL / 30 – 15,000 Hz frequency response ideal for capturing fast transients in vocals, acoustic instruments and concert hall performances
- Legendary Shure quality and superior construction from hand-assembly of machined steel, silver, gold and aluminum materials
- Monocle stand mount custom swivel mount for fully versatile placement and orientation
- Protective wood case included for storage when not in use

Available Models

KSM313	Includes Monocle stand mount and wood storage case
--------	--

Specifications




Transducer Type	Roswellite™ Ribbon
Frequency Response	30Hz – 15,000Hz
Directional Polar Pattern	Bidirectional
Output Impedance	Transformer, balanced, actual 270 Ω
Polarity	Positive pressure on front side of ribbon produces positive voltage on pin 2 relative to pin 3, pin 1 ground
Sensitivity (at 1 kHz, open circuit voltage)	-54.5 dBV/Pa (1.88 mV/Pa)
Dimensions & Weight	Diameter: 4.318 cm (1.7 in) Height: 13.5 cm (5.3 in) Weight: 400g (0.881 lbs) Weight: 597g (1.131 lbs) w/Monocle mount
Max SPL	146 dB
Connector	Three pin professional audio (XLR) male



KSM313

Accessories and Replacement Parts

A313SM	Shock Mount
A313M	Monocle Stand Mount

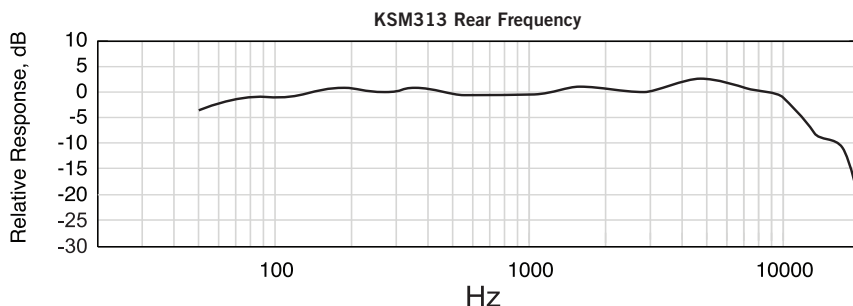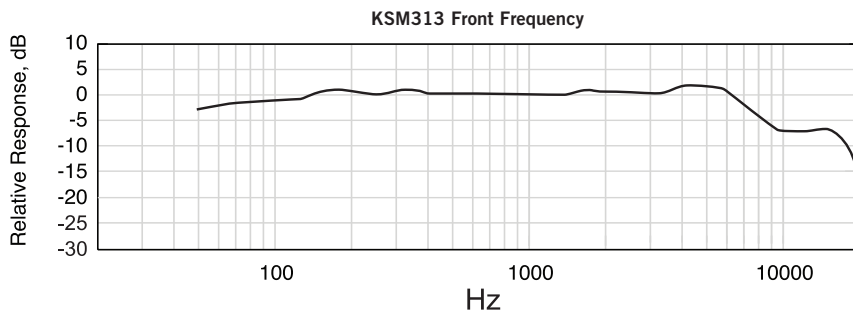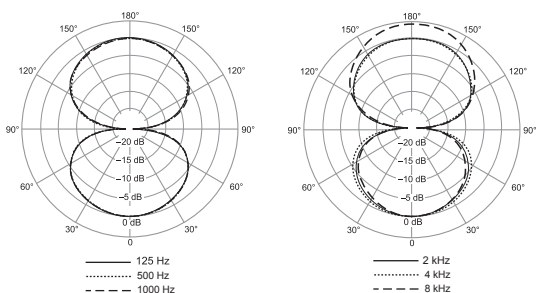

SHURE
LEGENDARY
PERFORMANCE™

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>